

## Raze Bollard

96631807 RAB 1L35-730 WPC HF/R SLA CL1 SP 900 ANT

|                |      |      |  |  |  |  |  |
|----------------|------|------|--|--|--|--|--|
| ISO 9223<br>C5 | IP66 | IK10 |  |  |  |  |  |
|----------------|------|------|--|--|--|--|--|

### Raze Bollard


A flange mounted LED bollard of 900mm height, incorporating Thorn's Flat beam® technology. 1 LED driven at 350mA. LED driver included. Class I electrical, IP66, IK10. Housing: die-cast aluminium (EN44300, compatible with seaside installation), powder coated, textured anthracite (close to RAL7043). Bowl: UV stabilised polycarbonate, semi-frosted. Fasteners: stainless steel. Configured as presence detection slave with power line control. Complete with 3000K LED.

6kV surge protection as standard. 200mm x 200mm fixing centres, bolts not included.

Dimensions: 173 x 220 x 900 mm  
 Luminaire input power: 15 W  
 Luminaire luminous flux: 696 lm  
 Luminaire efficacy: 46 lm/W  
 Weight: 8.5 kg



TLG\_RAZB\_F\_900\_PDB.jpg

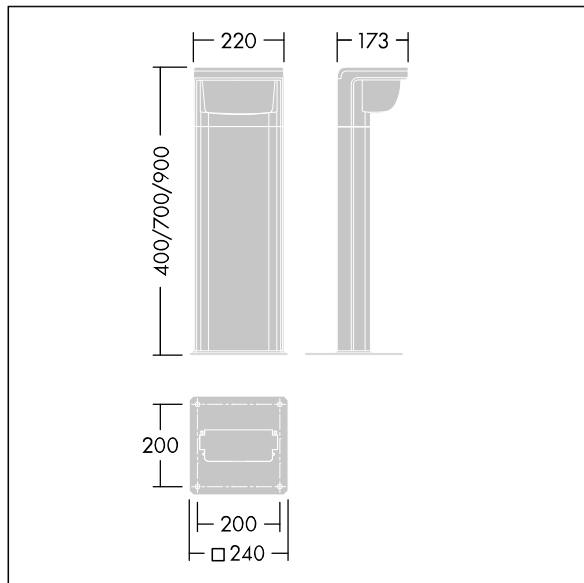

TLG\_RAZB\_M\_FAM.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

# Raze Bollard

96631807 RAB 1L35-730 WPC HF/R SLA CL1 SP 900 ANT

THORN