

Royal Modular

THORN

96650248 ROYAL MOD LED2700-940 12X3 AH HFI FP

IP40



LED

Royal Modular


An LED recessed luminaire, with air-handling functionality. Electronic, DALI-2 dimmable. Class II electrical, IP40. Body: painted steel. Diffuser: MicroPrismatic. Fitted with flex and plug. Complete with 4000K LED, Colour Rendering Index min.: 90

Type IC in accordance with AS/NZS 60598.2.2-2016 Recessed Luminaires.

Dimensions: 1195 x 295 x 41 mm
Luminaire input power: 22.9 W
Luminaire luminous flux: 2416 lm



TLG_RYLM_F_RMAH01.jpg

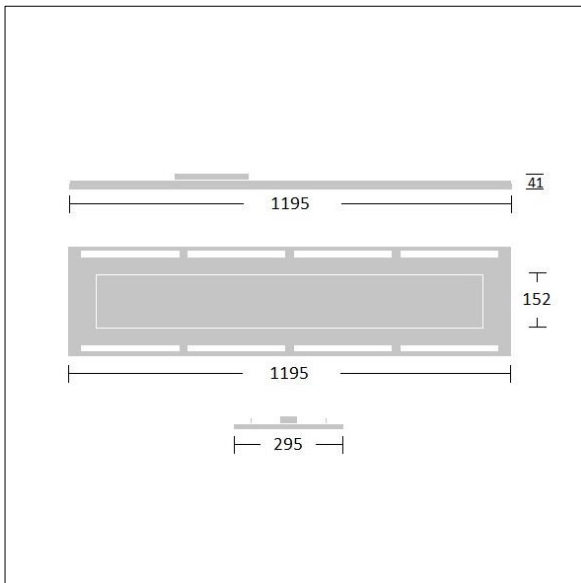

TLA_SUSP_M_LD3.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Royal Modular

96650248 ROYAL MOD LED2700-940 12X3 AH HFI FP

THORN