

# Punch

# THORN

## 96630509 PUNCH 3 ASYM MSP 2200-840 L12 HFIX

|          |      |      |  |  |  |  |       |                         |
|----------|------|------|--|--|--|--|-------|-------------------------|
| UK<br>CA | IP20 | IK03 |  |  |  |  | 650°C | T <sub>a</sub> 0<br>+25 |
|----------|------|------|--|--|--|--|-------|-------------------------|

### Punch


A slim, suspended luminaire with asymmetrical distribution. DALI dimmable LED driver. Body: steel sheet, powder coated white (close to RAL9016). Endcaps: steel sheet powder coated white (close to RAL9016). Louvre: glossy aluminium, double parabolic. Class I electrical, IP20, Impact strength: IK03. Electrical connection via pre-installed power cord (2.5m). Complete with 4000K LED. Suspension kit to be ordered separately

Y-Suspension connector included - Suspension cord with ceiling rose to be ordered separately (22171581).

Dimensions: 1180 x 116 x 44 mm  
Luminaire input power: 16 W  
Luminaire luminous flux: 2149 lm  
Luminaire efficacy: 134 lm/W  
Weight: 3.5 kg



TLG\_PNCH\_F\_ASYM.jpg

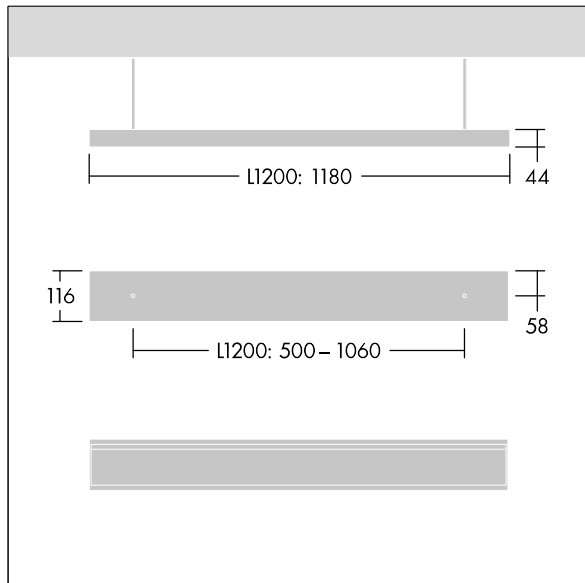

TLG\_PNC3\_M\_LDASY.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# Punch

96630509 PUNCH 3 ASYM MSP 2200-840 L12 HFIX

THORN