

# Indilouver Pro

THORN

96649678 INDI PRO LED2700-940 12x3 AH HFI E2 FP

RoHS	T <sub>a</sub> 0 +40	IP20	IK02			750°C	
------	-------------------------	------	------	--	--	-------	--


## Indilouver Pro

A stylish ceiling recessed LED luminaire. DALI-2 dimmable LED driver with 2 hour, manual test, emergency lighting circuit. Class I electrical, IP20, Impact strength: IK02. Body: white painted steel, with option for concealed air return. Diffuser: 2mm thick, clear PMMA, linear profile. Baffle: aluminium extrusion. Fitted with flex and plug. Complete with 4000K LED, COI approved.

Dimensions: 1195 x 295 x 76 mm  
Luminaire input power: 27 W  
Luminaire luminous flux: 3012 lm  
Luminaire efficacy: 112 lm/W  
Weight: 5.8 kg



TLG\_INPR\_F\_WH.jpg

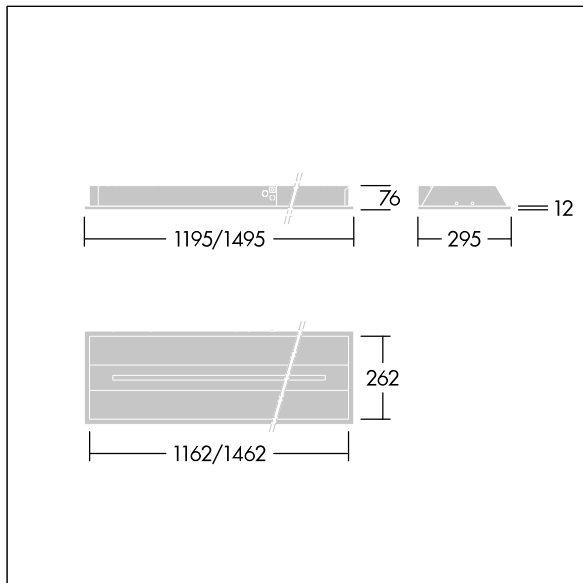

TLG\_INPR\_M\_M-L.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# Indilouver Pro

96649678 INDI PRO LED2700-940 12x3 AH HFI E2 FP

THORN