

Cetus3

THORN

96634898 CETUS3 MSF 2000-840 EHF RWH

| | | | | | | | | | | |
|---------------------------|----------|------|---------|------|---|---|----|---|-------|---------------------------|
| IEC EN 60598-1 RG 1 | UK CA | IP43 | halogen | IK06 | ⊕ | ⚡ | ⚙️ | 🔧 | 850°C | T _a -20 +25 |
|---------------------------|----------|------|---------|------|---|---|----|---|-------|---------------------------|


Cetus3

Surface mounted LED downlight. Fixed output LED driver. Body: die-cast aluminium. Diffuser: polycarbonate, smooth reflector in white finish with wide beam. Trim: high quality, highly reflective polycarbonate. Class I electrical, IP43. Installation plate to be fitted directly to ceiling, for mounting via BESA box or wire suspension use available accessory. Electrical connection via 3/5 pole, push in, terminal block, Housing mounts to installation plate with twist and lock bayonet mechanism. Complete with 4000K LED

Dimensions: Ø181 x 182 mm
Luminaire input power: 15.3 W
Luminaire luminous flux: 2048 lm
Luminaire efficacy: 134 lm/W
Weight: 2.59 kg



TLG_CTU3_F_MSF_RWH.jpg

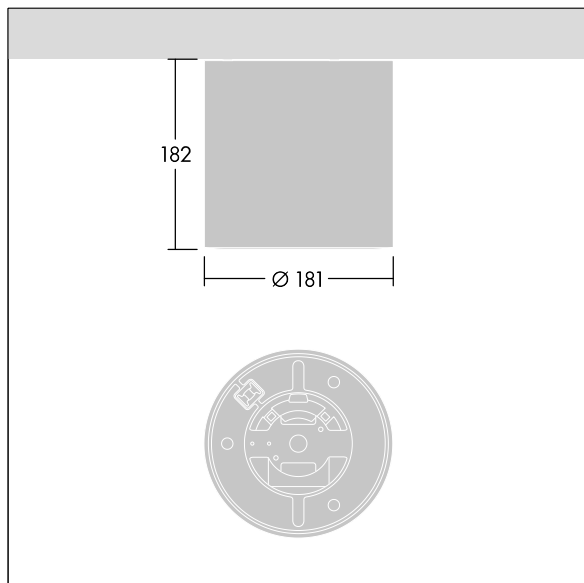

TLG_CTU3_M_MSF.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting