

## Contrast

96635282 CONT3 4L50 BU NB NG IO ANT

ISO 9223	IP66	IK08				T <sub>a</sub> -20 +35
C5						


### Contrast

A small architectural floodlight LED floodlight with LEDs driven at 500mA and a narrow beam distribution. ,. Pre-wired with IP66 connector, gear box to be ordered separately. Class II electrical (this product is not earthed), IP66, IK08. Body: die-cast aluminium (EN AC-44300), powder coated, textured anthracite (close to RAL7043). Compatible with coastal environments. Glass: tempered, 5mm thick. Gasket: EPDM. Screws: geomet. Complete with blue LED

Dimensions: Ø83 x 103 mm  
 Luminaire input power: 9 W  
 Luminaire luminous flux: 145 lm  
 Luminaire efficacy: 16 lm/W  
 Weight: 0.92 kg



TLG\_CON3\_F\_XS.jpg

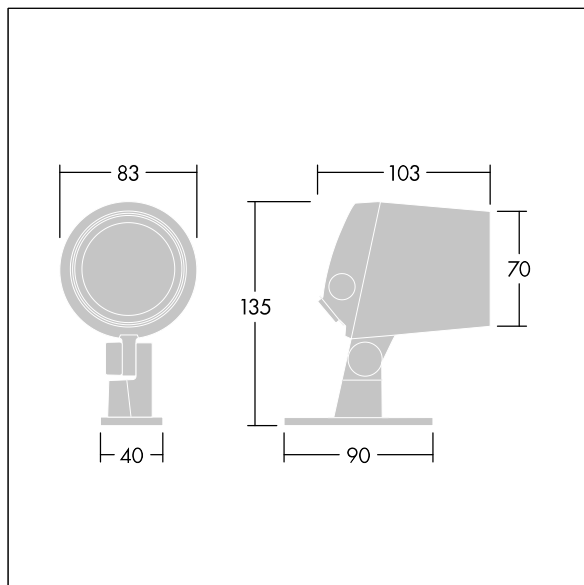

TLG\_CONL\_M\_4L.wmf

This product contains a light source of energy efficiency class G.

# Contrast

96635282 CONT3 4L50 BU NB NG IO ANT

THORN