

Novaline Style

THORN

96635362 NOVS M 3500-840 DI HFI E3D WH

| | | | | | | | | | | | | |
|---------------------------|------|----------|------|---|---------|------|--|--|--|--|-------|-------------------------|
| IEC EN 60598-1 RG 1 | RoHS | UK CA | IP54 | D | halogen | IK08 | | | | | 850°C | T _a 0 +25 |
|---------------------------|------|----------|------|---|---------|------|--|--|--|--|-------|-------------------------|


Novaline Style

Decorative circular luminaire with medium body. Low indirect component for wall and ceiling illumination. Electronic, DALI dimmable with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Aesthetic trim of the luminaire made of polycarbonate in white. Diffuser: opal polycarbonate. Class II electrical (this product is not earthed), IP54. Complete with 4000K LED.

Dimensions: Ø397 x 69 mm
Luminaire input power: 24.6 W
Luminaire luminous flux: 3500 lm
Luminaire efficacy: 142 lm/W
Weight: 2.42 kg



TLG_NOVS_F_4WH.jpg

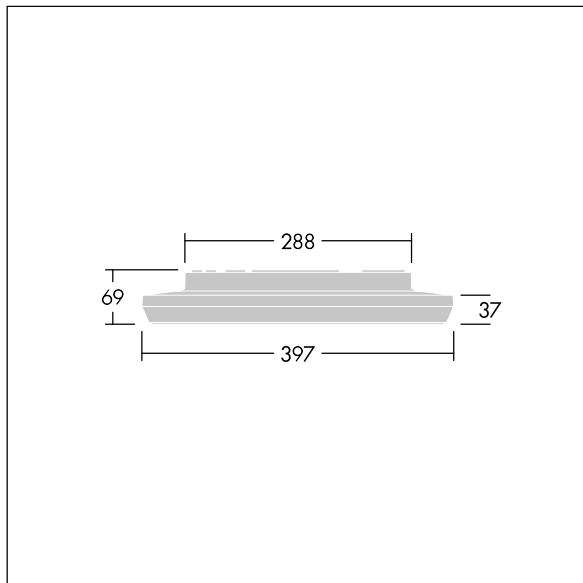

TLG_NOVS_M_LD400.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting