

Lucem

THORN

96651809 LUCEM L LED5000-930 HFX ADJ BK

ISO 9223 C4	IP65	IK06		
----------------	------	------	---	---


Lucem

An architectural LED wall mounted luminaire with asymmetric light distribution, particularly suitable for indirect lighting applications. Electronic, DALI dimmable control gear. Class I electrical, IP65, IK06. Body: die-cast aluminium (EN AB-47100), powder coated textured black (close to RAL9005). Adjustable tilt angle of the luminaire housing 0° - 60°. Supplied in one box, ready to install. Complete with 3000K LED.

Luminaire input power: 40 W
Luminaire luminous flux: 4998 lm
Luminaire efficacy: 125 lm/W
Weight: 3.5 kg



TLG_LUCEM_F_L_ADJ.jpg

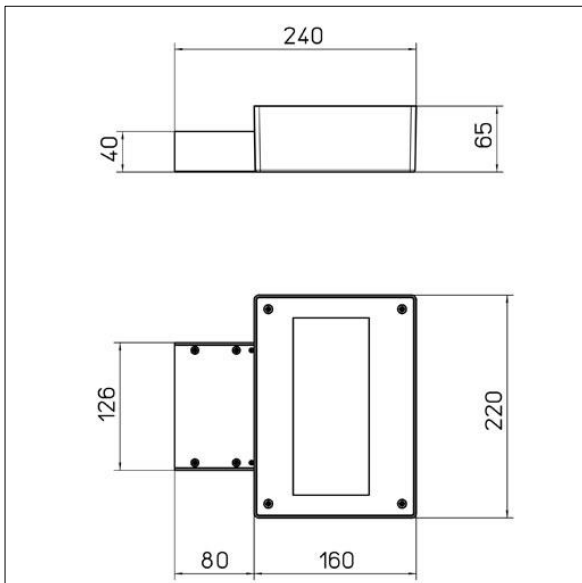

TLG_LUCEM_M_L_ADJ.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Lucem

96651809 LUCEM L LED5000-930 HFX ADJ BK

THORN