

## 96651825 LUCEM L LED5000-940 HFX ANT

|                |      |      |   |   |  |
|----------------|------|------|---|---|--|
| ISO 9223<br>C4 | IP65 | IK06 |  |  |  |
|----------------|------|------|---|---|--|


### Lucem

An architectural LED wall mounted luminaire with asymmetric light distribution, particularly suitable for indirect lighting applications. Electronic, DALI dimmable control gear. Class I electrical, IP65, IK06. Body: die-cast aluminium (EN AB-47100), powder coated textured anthracite (close to RAL7016). Supplied in one box, ready to install. Complete with 4000K LED.

Luminaire input power: 40 W  
 Luminaire luminous flux: 5396 lm  
 Luminaire efficacy: 135 lm/W  
 Weight: 3 kg



TLG\_LUCEM\_F\_L.jpg

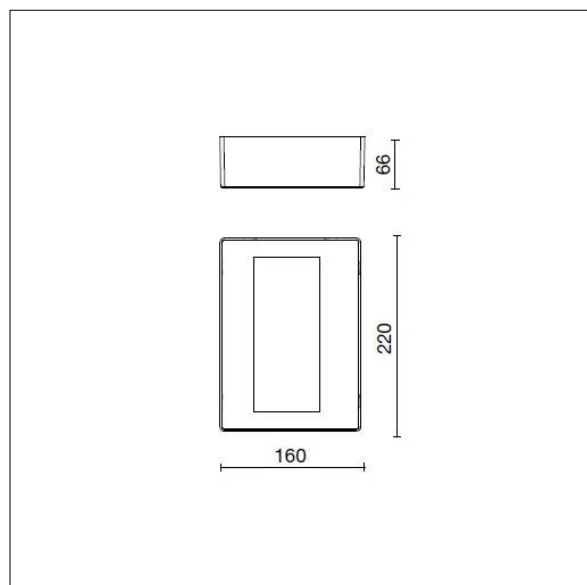

TLG\_LUCEM\_M\_L.wmf