

## Candle Bollard

96679074 CN B 8L50 830 RSC CL2 MPL ANT

ISO 9223	C5	IP66	IK10				T <sub>a</sub> 25	
----------	----	------	------	---	---	---	-------------------	--


### Candle Bollard

Environmentally respectful bollard with limited upward lighting emission with 8 LEDs driven at 500mA with Radial symmetrical comfort light distribution. Fixed output LED driver. Class II electrical (this product is not earthed), IP66, IK10. Base: die-cast aluminium (EN AC-44300). Finish: powder coated aluminium, texturized anthracite (close to RAL7043). Diffuser: UV stabilised clear polycarbonate. Flange mounted. Complete with 3000K LED.

Dimensions: Ø234 x 1017 mm  
 Luminaire input power: 13.6 W  
 Weight: 7.95 kg  
 Scx: 0.06 m<sup>2</sup>  
 Luminaire efficacy: 95 lm/W



TLG\_CNDB\_F\_MPL.jpg

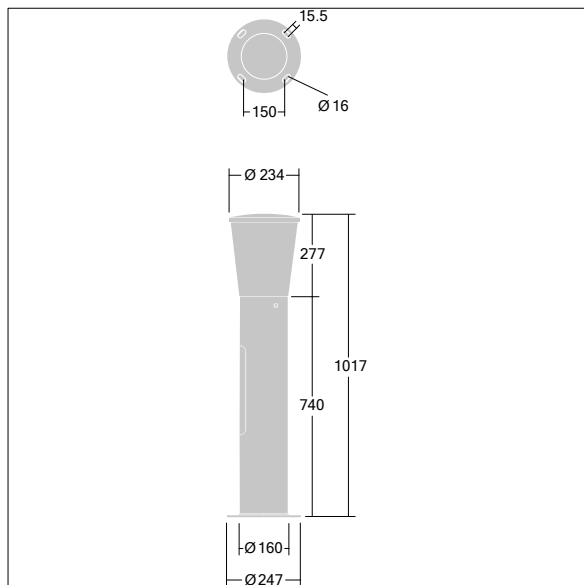

TLG\_CNDB\_M\_MPL.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

# Candle Bollard

96679074 CN B 8L50 830 RSC CL2 MPL ANT

THORN