

Legend

96262564 LEGEND 36L70 RC 740 BP CL1 MSU 34G

| | | | | | | | |
|----------|------|------|---|---|---|---|---|
| ISO 9223 | IP65 | IK08 | ⊕ | ⚡ | ⚡ | ⚡ | ⚡ |
| C5 | | | | | | | |

Legend

A modern heritage suspended LED lantern with closed optic. Electronic, Class I electrical, IP65, IK08. Body: die-cast aluminium powder coated grey 900 textured finish (close to RAL 7043). Enclosure: flat toughened glass. Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode. Complete with 4000K LED.

Dimensions: 446 x 446 x 1004 mm

Luminaire input power: 77 W


Weight: 16.5 kg

Scx: 0.14 m²

Scy: 0.14 m²



TLG_LGND_F_LED PDBLIT.jpg

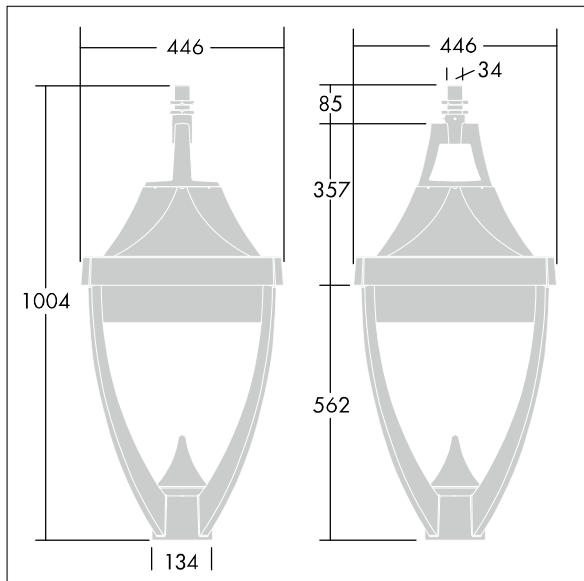

TLG_LGND_M_MSU.wmf

This product contains a light source of energy efficiency class D.

Legend

96262564 LEGEND 36L70 RC 740 BP CL1 MSU 34G

THORN