

Legend

96262579 LEGEND 36L50 RC 740 BP PM CL1 T60

| | | | | | | | |
|----------------|------|------|--|--|--|--|--|
| ISO 9223 C5 | IP65 | IK08 | | | | | |
|----------------|------|------|--|--|--|--|--|

Legend

A modern heritage post top LED lantern with closed optic. Electronic, Class I electrical, IP65, IK08. Body: die-cast aluminium powder coated grey 900 textured finish (close to RAL 7043). Enclosure: flat toughened glass. Equipped with Mini Photozell. Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode. Complete with 4000K LED.

Dimensions: 446 x 446 x 999 mm

Luminaire input power: 55 W


Weight: 17.5 kg

Scx: 0.14 m²

Scx: 0.14 m²



TLG_LGND_F_CLS.jpg

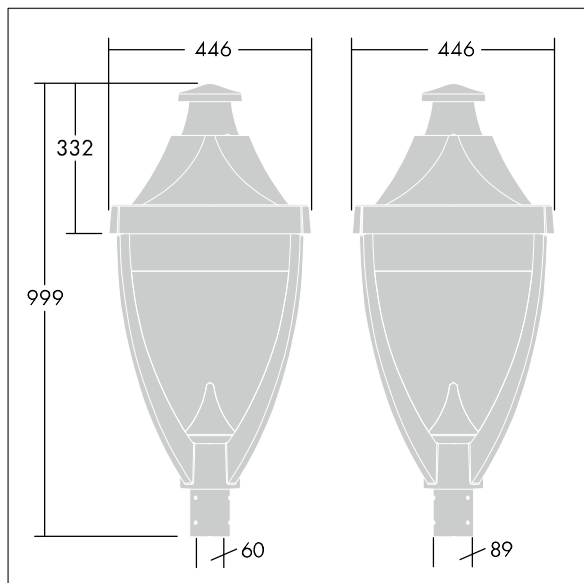

TLG_LGND_M_MTP.wmf

This product contains a light source of energy efficiency class D.

Legend

96262579 LEGEND 36L50 RC 740 BP PM CL1 T60

THORN