

## R2L2

96266335 R2L2 S 48L70 740 EWS BP 3550 CL2 GY

ISO 9223 C5	IP66	IK08					T <sub>a</sub> -25 +35
----------------	------	------	--	--	--	--	---------------------------


### R2L2

A small size LED road lighting lantern with 48 LEDs driven at 700mA with Extra Wide Street optic. LED driver Programmable. Class II electrical (this product is not earthed), IP66, IK08. Housing: die-cast aluminium (EN AC-44300), powder coated textured light grey. Enclosure: tempered flat glass. Screws: stainless steel, Ecolubric® treated. Post top (Ø60/76mm, tilted 0°/5°/10°) or lateral (Ø34/42/49/60mm, tilted 0°/-5°/-10°/-15°) mounting. For lateral mounting to Ø34/42mm spigots an adaptor (59005840 R2L2 MA34/42 NPA) should be ordered separately. Equipped with 50% power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. Complete with 4000K LED.

Dimensions: 655 x 362 x 155 mm  
 Luminaire input power: 101 W  
 Luminaire luminous flux: 14617 lm  
 Luminaire efficacy: 145 lm/W  
 Weight: 9.78 kg  
 Scx: 0.05 m<sup>2</sup>



TLG\_R2L2\_F\_SPDB.jpg

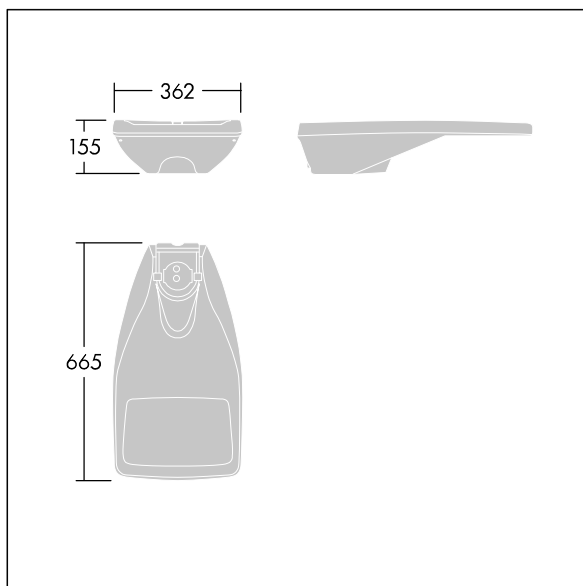

TLG\_R2L2\_M\_LDS.wmf

This product contains light sources of energy efficiency classes D, E.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
 © Thorn Lighting

**R2L2**

**96266335 R2L2 S 48L70 740 EWS BP 3550 CL2 GY**

**THORN**