

96643075 CQ 12L35 740 RWT BS 3550 CL2 M60 GY-S

|                |  |  |      |      |  |  |  |  |  |                   |  |
|----------------|--|--|------|------|--|--|--|--|--|-------------------|--|
| ISO 9223<br>C5 |  |  | IP66 | IK08 |  |  |  |  |  | T <sub>a</sub> 25 |  |
|----------------|--|--|------|------|--|--|--|--|--|-------------------|--|


## CiviTEQ

A small size LED road lighting lantern with 12 LEDs driven at 350mA with Wet Road optic. Electronic, fixed output control gear. Class II electrical (this product is not earthed), IP66, IK08. Housing: die-cast aluminium (EN AC-44300), Light grey 150 sanded textured (close to RAL9006). Enclosure: toughened flat glass. Screws: stainless steel, Ecolubric® treated. Supplied with Ø60mm spigot adaptor which can be fitted for post-top (0°/5°/10° tilt) or side-entry (-20°/-15°/-10°/-5°/0° tilt). Equipped with 50% power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. It can be deactivated at installation with an easily accessible internal switch. Complete with 4000K LED. Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode.

Dimensions: 390 x 230 x 133 mm  
Luminaire input power: 15 W  
Luminaire luminous flux: 2153 lm  
Luminaire efficacy: 144 lm/W  
Weight: 5.7 kg  
Scx: 0.077 m<sup>2</sup>



TLG\_CTEQ\_F\_SMTP36LEDPDB.jpg

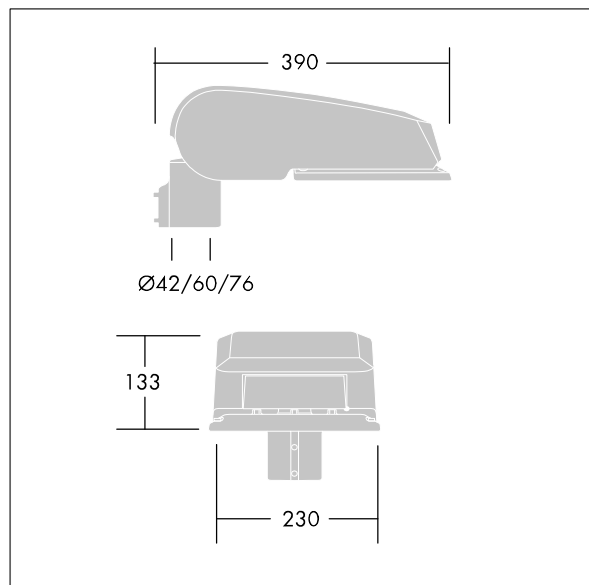

TLG\_CETQ\_M\_S.wmf

This product contains light sources of energy efficiency class D.

**CiviTEQ**

**96643075 CQ 12L35 740 RWT BS 3550 CL2 M60 GY-S**

**THORN**