

# Gladiator

THORN

96651751 GLAD G2 LED6000-840 L12 HF E2

RoHS	T <sub>a</sub> 0 +40	IP66	IK10		
------	-------------------------	------	------	--	--

## Gladiator

A robust luminaire, suitable to operate in ambient temperatures up to 40°C. Lumen output can be selected by changing I-Select resistor; Default output of 5941 lm (HI) or 3945 lm (LO). Electronic, fixed output control gear with 2 hour, manual test, emergency lighting circuit. Class I electrical, IP66, IK10. Body: die-cast aluminium with less than 1% copper content, finished anthracite powder coat (PANTONE Cool Gray 10C). Diffuser: opal polycarbonate. Safe-T Locking System (SLS) : thermoplastic alloy of polycarbonate and acrylonitrile butadiene styrene (ABS). Gasket: liquid poured. Complete with 4000K LED

Emergency classification in accordance with AS/NZS 2293, C0 = C125, C90 = C125.


Dimensions: 1316 x 163 x 115 mm

Luminaire input power: 51 W

Weight: 9 kg



TLG\_GLAD2\_F\_LED.jpg

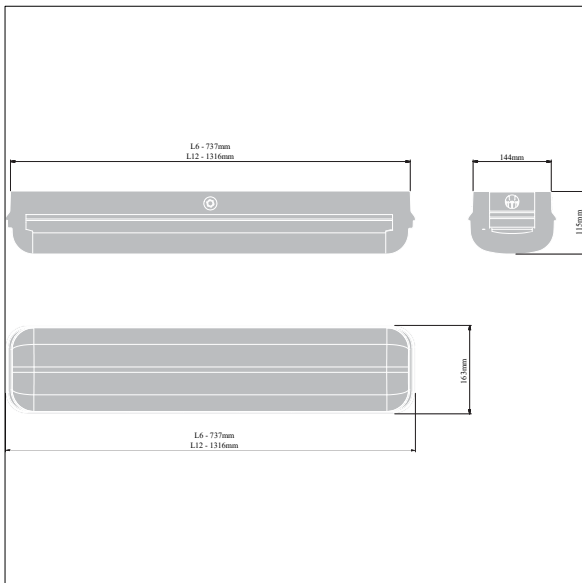

TLG\_GLAD2\_M\_LED.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# Gladiator

96651751 GLAD G2 LED6000-840 L12 HF E2

THORN