

Gladiator

THORN

96651486 GLAD G2 LED6000-840 L12 HFI MWS

RoHS	T _a 0 +40	IP66	IK10	⊕	Ⓢ	
------	-------------------------	------	------	---	---	--


Gladiator

A robust luminaire, suitable to operate in ambient temperatures up to 40°C. Lumen output can be selected by changing I-Select resistor; Default output of 5941 lm (HI) or 3945 lm (LO). Electronic, DALI dimmable control gear. Class I electrical, IP66, IK10. Body: die-cast aluminium with less than 1% copper content, finished anthracite powder coat (PANTONE Cool Gray 10C). Diffuser: opal polycarbonate. Safe-T Locking System (SLS): thermoplastic alloy of polycarbonate and acrylonitrile butadiene styrene (ABS). Gasket: liquid poured. Integral microwave presence sensor (MWS) for on/off control. Complete with 4000K LED

Dimensions: 1316 x 163 x 115 mm
Luminaire input power: 51 W
Weight: 7.9 kg



TLG_GLAD2_F_LED.jpg

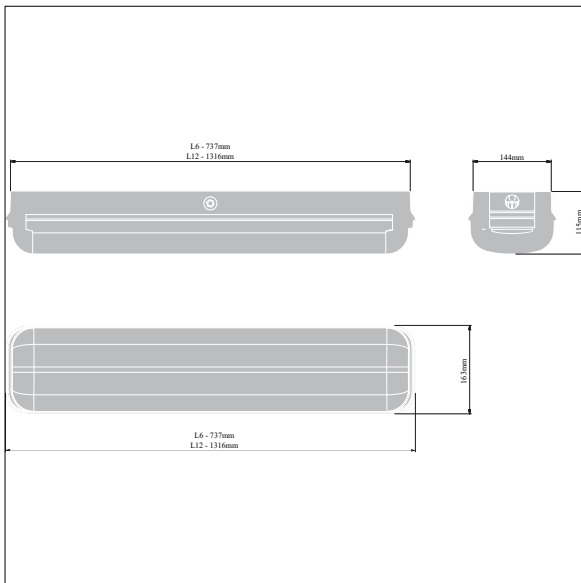

TLG_GLAD2_M_LED.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Gladiator

96651486 GLAD G2 LED6000-840 L12 HFI MWS

THORN