


|      |                  |  |  |                           |  |
|------|------------------|--|--|---------------------------|--|
| RoHS | ↓ IP20<br>↑ IP40 |  |  | T <sub>a</sub> -20<br>+45 |  |
|------|------------------|--|--|---------------------------|--|

### Royal Pro


An ultra slim ceiling recessed LED modular luminaire. Fixed output LED driver. Body: white painted aluminium frame. Diffuser: High uniformity microprismatic, UGR<19. Suitable for Office, Retail and School applications. Class II electrical (this product is not earthed), IP40\_IP20. Electrical connection: Fitted with flex and plug. Complete with 4000K LED. CRI90+, 2 Step MacAdam LED.

This product has a Cyanosis Observation Index (COI) of less than 3.3, in accordance with AS/NZS 1680.2.5:1997 for hospitals and medical tasks.

Dimensions: 595 x 595 x 11 mm  
Luminaire input power: 41.1 W  
Luminaire luminous flux: 4752 lm  
Luminaire efficacy: 116 lm/W  
Weight: 4 kg

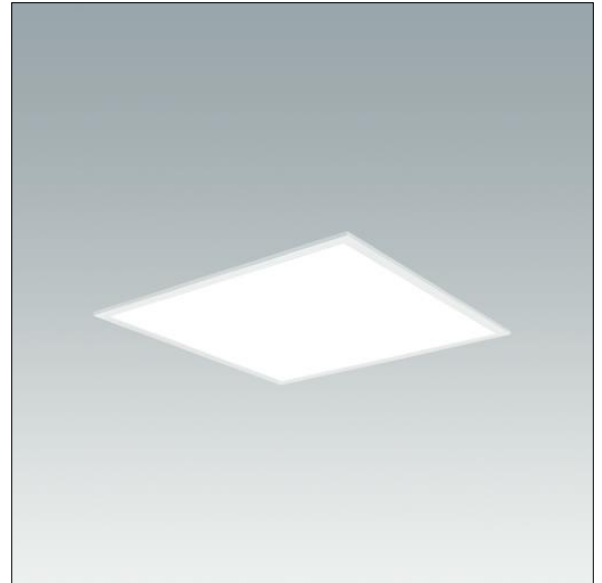

TLG\_RYLL\_F\_03.jpg

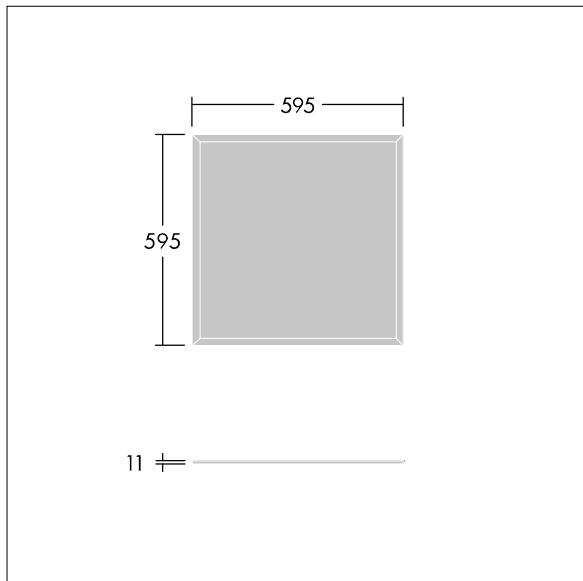

TLG\_RYLL\_M\_LD3.wmf

**Royal Pro**

**96652692 ROYAL PRO LED4500-940 6X6 HF TR FP**

**THORN**