

RoHS	↓ IP20 ↑ IP40			T <sub>a</sub> -20 +45	
------	------------------	--	--	---------------------------	--

### Royal Pro


An ultra slim ceiling recessed LED modular luminaire. DALI dimmable LED driver. Body: white painted aluminium frame. Diffuser: High uniformity microprismatic, UGR<19. Suitable for Office, Retail and School applications. Class II electrical (this product is not earthed), IP40\_IP20. Electrical connection: Fitted with flex and plug. Complete with 2700-6500K LEDs. CRI90+, 2 Step MacAdam LED.

This product has a Cyanosis Observation Index (COI) of less than 3.3, in accordance with AS/NZS 1680.2.5:1997 for hospitals and medical tasks.

Dimensions: 1195 x 295 x 11 mm  
Luminaire input power: 31.5 W  
Luminaire luminous flux: 3465 lm  
Luminaire efficacy: 110 lm/W  
Weight: 4 kg



TLG\_RYLL\_F\_02.jpg

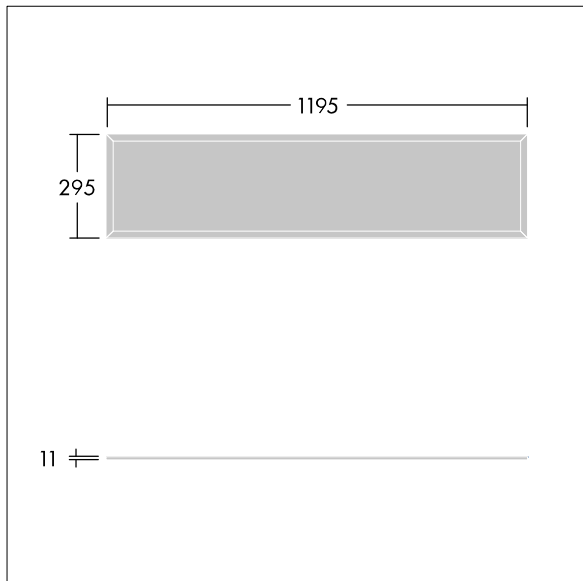

TLG\_RYLL\_M\_LD1.wmf

**Royal Pro**

**96652700 ROYAL PRO LED3500-927-65 12X3 HFI TR F**

**THORN**