



## Avenue F2

### Post top lantern with a distinctive design and lighting signature

- IDA Dark Sky Approved
- \*IDA fixture seal of approval relates to  $\leq 3000$  K only and clear enclosures. Luminaires must be mounted as photometered.
- With conical bowl and prismatic crown for reduced glare and distinctive appearance
- With flat enclosure for minimum upward lighting, preserving dark skies
- Connectivity with Zhaga socket
- Choice of dimming options and controls to reduce energy consumption and preserve dark skies
- OTHER OPTIONS ARE AVAILABLE (colour temperature, controls, colour...). See myProduct for configuration options



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

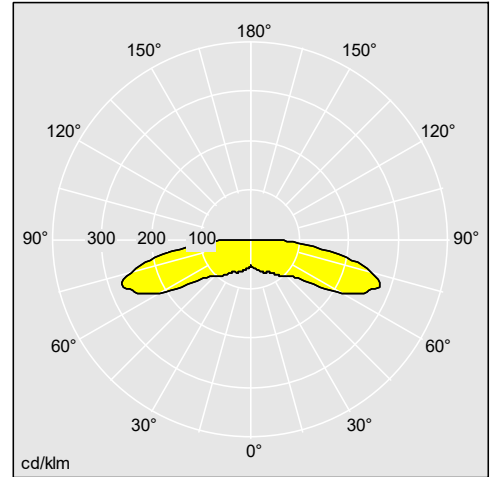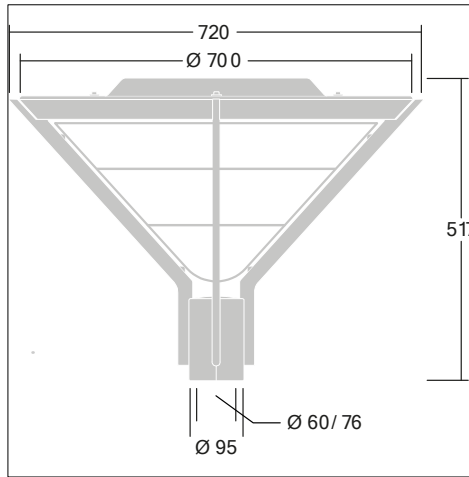

96260128

### Material/Finish

Base and arms: die cast aluminium (AS9U3, LM24 equivalent, EN AC-46000, standard corrosion class C3).  
 Canopy: spun aluminium  
 Finish: texturised anthracite (close to RAL7043), Choice of RAL colors via Myproduct  
 Diffuser: clear UV stabilised PC  
 Screw fixings: stainless steel

### Installation/Mounting

Suitable for mounting on top Ø76mm or Ø60mm, spigot internal length: 100mm. Recommended height: 3/4m. Equipped with cable gland or pre-wired with HO5VVF cable. Spare drivers and LED modules available. Delivered ready to install, complete with factory fitted integral gear tray, all supplied in a single carton.

# Avenue F2

**Ordering Guide** Supplied complete with LEDs

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
<b>Avenue F2 with conical bowl</b>				
AVF 18L70-740 RS CL BS 3550 CL2 CON ->	LED		9	96260062
AVF 18L70-740 WST CL BS 3550 CL2 CON ->	LED		9,3	96260099