



Chartor (APAC)

A timeless bollard offering modest visual guidance and comfortable white light with minimal glare due to the semi-opal anti-UV PC diffuser

- Suitable for any application thanks to high specs and two mounting types: base plate (MPL) and ground (MGR)
- Simply order one post and one head, for a complete bollard.
- The LED head can be easily connected to all Chartor Bollard types for refurbishment to a low power, low maintenance luminaire. Simply connect the LED driver directly to the mains



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

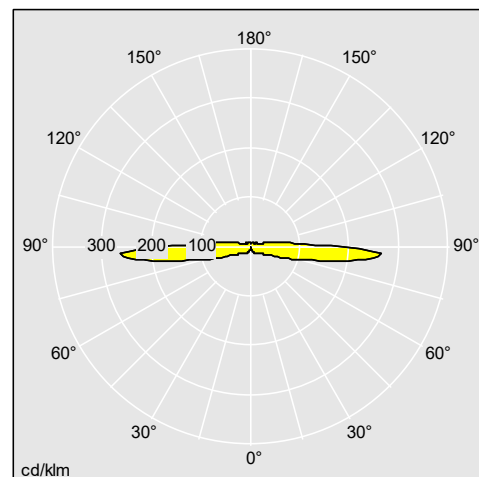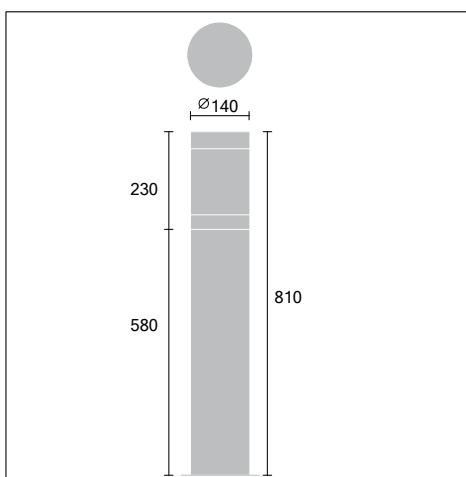

96279626

Material/Finish

Head: die-cast aluminium, colours available to special order.

Lenses: clear polycarbonate.

Internal optics: die-cast aluminium.

Post: galvanised steel or painted powder coat black, other colours available to special order.

Installation/Mounting

Base plate or buried mounting, latter option embeds 450mm into the ground. 250mm base plate version fixes via four Ø 15mm holes at 200mm centres. Ø 60mm central hole for wiring. Three way terminal block for 2 x 4mm² cable.

Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Chartor, head, black				
CHARTOR HEAD LF E27 BK			2	96063122
CHARTOR HEAD LF LED2000-840 SATIN BLACK	LED		2,3	96646244
CHARTOR HEAD LF LED800-840 LUC S/BLACK	LED		2,3	96649333
Chartor, head, aluminium				
CHARTOR HEAD LF E27 AL			2	96063107
CHARTOR HEAD LF LED2000-840 AL	LED		2,3	96646179
CHARTOR HEAD LF LED800-840 LUC AL	LED		2,3	96649335

Chartor (APAC)

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Chartor, post, black				
CHARTOR POST MPL BK			12	96018939
CHARTOR POST MGR BK			10	96018951
Chartor, post, galvanised				
CHARTOR POST MPL GAL			12	96031973
CHARTOR POST MGR GAL			10	96031975