



## PopPack

### The original PopPack batten with integrated LED technology for ultra-low energy consumption

- LED one for one replacement for single and twin T8/T5 (35W up to 80W) fluorescent batten
- LED one for one replacement for single and twin T8/T5 fluorescent battens
- Up to 153lm/W - exceeding building regulation requirements
- Optional screws can be added to end caps to lock the housing to ensure increased security
- Additional savings can be achieved via DALI control and an integral PIR sensor.
- Versions adapted for mounting onto Contus trunking available.



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

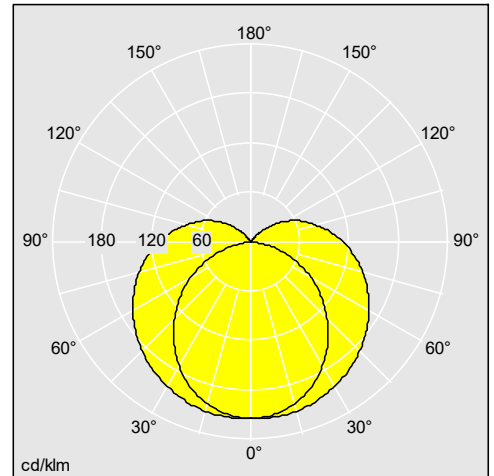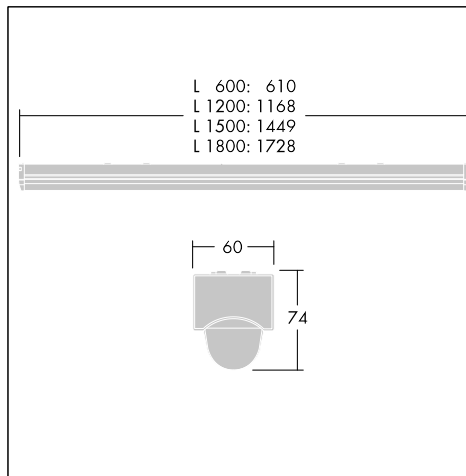

96242251

### Material/Finish

Batten: pre-coated roll form steel, white (RAL9016)  
 End caps/lamp holders: injection moulded polycarbonate, white  
 Diffuser: textured opal acrylic  
 Contus adapter: pre-coated roll form steel, white (similar to RAL9016)

### Installation/Mounting

1 or 2 x (3 x 2 x 2.5mm<sup>2</sup>) terminal blocks with capacity for loop in/out 2.5mm<sup>2</sup> cables. Ambient temperature: -20 to +25°C for the standard product, 0 to 25°C for the emergency versions, normal, dry, indoor atmospheres. Suitable for direct surface mounting, BESA mounting or wire suspension. Easy alignment through slots in the spine. Optional screws can be added to end caps to lock the housing.

Versions adapted for Contus trunking come pre-assembled, ready to fit quickly and easily with twist & lock mechanical/electrical connections.

# PopPack

## Ordering Guide

| Description                      | ILCOS Code | Socket | Wt (kg) | SAP Code |
|----------------------------------|------------|--------|---------|----------|
| <b>PopPack battens</b>           |            |        |         |          |
| POPPACK LED 3000-840 HF L1200    | LED        |        | 1,3     | 96631538 |
| POPPACK LED 4500-840 HF L1200    | LED        |        | 1,4     | 96631542 |
| POPPACK LED 6000-840 HF L1500    | LED        |        | 1,7     | 96631558 |
| POPPACK LED 9000-840 HF L1500    | LED        |        | 1,7     | 96631562 |
| POPPACK LED 1700-840 HF L600     | LED        |        | 0,74    | 96634320 |
| POPPACK LED 2300-840 HF L600     | LED        |        | 0,74    | 96634321 |
| <b>PopPack battens, dimmable</b> |            |        |         |          |
| POPPACK LED 3000-840 HFI L1200   | LED        |        | 1,4     | 96631540 |
| POPPACK LED 4500-840 HFI L1200   | LED        |        | 1,4     | 96631544 |
| POPPACK LED 1700-840 HFI L600    | LED        |        | 0,83    | 96634322 |
| POPPACK LED 2300-840 HFI L600    | LED        |        | 0,83    | 96634323 |