



Alumet Control Direct LED

Combines elegance, performance, and intelligence

- Best optical offer & efficacy
- Sustainable resistance to an active city life
- Great integration with a fine design and appearance



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

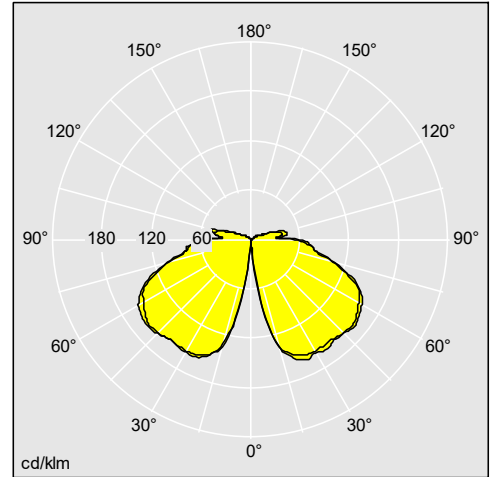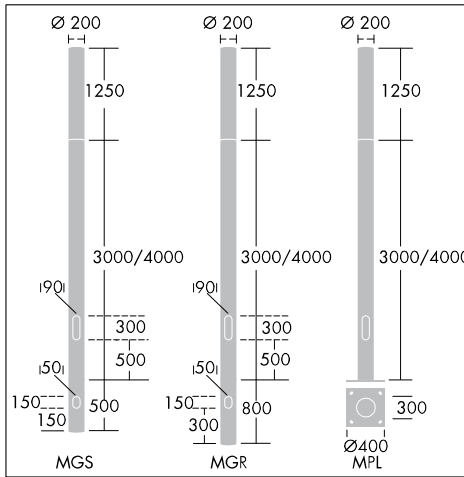

96274719

Material/Finish

Diffuser: clear UV stabilised PC treated with anti-graffiti varnish

Top cap: die-cast aluminium (EN AC-46000), standard corrosion class C3.

Column: extruded aluminium

Top/Column/Cover: powder coated textured silver grey (close to RAL 9006) Other RAL on request

Installation/Mounting

3 or 4m high columns, flange or root mounted (MGR or MGS) Flange: 400 x 400mm, spacings: 300 x 300mm, bolts 18 x 400 (included). Total height (with lit part of 1.25m): 4.25m or 5.25m, Diameter: 200mm. Fixing of the head by one single tool. Access to LED via 2 M6 screws in the top. Access to the driver and electronic tray by lifting up the PC diffuser and the bottom components cover. Pre-wired with 4m cable.

Alumet Control Direct LED

Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Alumet Control Direct LED, radial symmetric comfort optic				
ALUMET CD 18L35-730 R/S PR HFX CL1 W4M	LED		10,1	96274719
ALUMET CD 18L35-730 R/S PR HFX CL2 W4M	LED		10	96274720
ALUMET CD 18L35-740 R/S PR HFX CL1 W4M	LED		10,1	96274721
ALUMET CD 18L35-740 R/S PR HFX CL2 W4M	LED		10	96274722
ALUMET CD 18L35-740 R/S PR LRT CL2 G4M	LED		10	96274724
Alumet Control Direct LED, radial symmetric performance optic				
ALUMET CD 18L25-730 R/S CL HFX CL1 W4M	LED		10	96274725
ALUMET CD 18L25-730 R/S CL HFX CL2 W4M	LED		9,8	96274726
ALUMET CD 18L25-740 R/S CL HFX CL1 W4M	LED		10	96274727
ALUMET CD 18L25-740 R/S CL HFX CL2 W4M	LED		9,8	96274728
ALUMET CD 18L50-730 R/S CL HFX CL1 W4M	LED		10	96274729
ALUMET CD 18L50-730 R/S CL HFX CL2 W4M	LED		9,8	96274730
ALUMET CD 18L50-740 R/S CL HFX CL1 W4M	LED		10	96274731
ALUMET CD 18L50-740 R/S CL HFX CL2 W4M	LED		9,8	96274732
Alumet Control Direct LED, narrow road asymmetric optic				
ALUMET CD 24L35-730 NR-A CL HFX CL1 W4M	LED		9,9	96274855
ALUMET CD 24L35-730 NR-A CL HFX CL2 W4M	LED		9,7	96274856
ALUMET CD 24L35-740 NR-A CL HFX CL1 W4M	LED		9,9	96274857
ALUMET CD 24L35-740 NR-A CL HFX CL2 W4M	LED		9,7	96274858
ALUMET CD 24L25-730 NR-A CL HFX CL1 W4M	LED		9,9	96274733
ALUMET CD 24L25-730 NR-A CL HFX CL2 W4M	LED		9,7	96274734
ALUMET CD 24L25-740 NR-A CL HFX CL1 W4M	LED		9,9	96274735
ALUMET CD 24L25-740 NR-A CL HFX CL2 W4M	LED		9,7	96274736
Alumet Control Direct LED, wet road symmetric optic				
ALUMET CD 24L35-730 RWETS CL HFX CL1 W4	LED		9,9	96274849
ALUMET CD 24L35-730 RWETS CL HFX CL2 W4	LED		9,7	96274850
ALUMET CD 24L35-740 RWETS CL HFX CL1 W4	LED		9,9	96274851
ALUMET CD 24L35-740 RWETS CL HFX CL2 W4	LED		9,7	96274852
ALUMET CD 24L25-740 RWETS CL HFX CL2 W4	LED		9,7	96274772
Alumet Control Direct LED, wide street comfort asymmetric optic				
ALUMET CD 24L35-730 WSC-A CL HFX CL1 W4	LED		9,9	96274861
ALUMET CD 24L35-730 WSC-A CL HFX CL2 W4	LED		9,7	96274862
ALUMET CD 24L35-740 WSC-A CL HFX CL1 W4	LED		9,9	96274863
ALUMET CD 24L35-740 WSC-A CL HFX CL2 W4	LED		9,7	96274864
ALUMET CD 24L25-730 WSC-A CL HFX CL1 W4	LED		9,9	96274739
ALUMET CD 24L25-730 WSC-A CL HFX CL2 W4	LED		9,7	96274740
ALUMET CD 24L25-740 WSC-A CL HFX CL1 W4	LED		9,9	96274741
ALUMET CD 24L25-740 WSC-A CL HFX CL2 W4	LED		9,7	96274742
Alumet Control Direct LED, columns				

Alumet Control Direct LED

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
ALUMET COL 4M MGR AL GRY NG			37,2	96259920
ALUMET COL 3M MPL AL FAI GRY NG			35	96259919
ALUMET COL 4M MPL AL NG R9999			36	96259932