



Cetus3

LED downlight available in three different sizes.

- High flexibility in the ceiling cut-outs with 95-125mm (size S), 145-180mm (size M), 190-230mm (size L) for easy refurbishments or fast initial installations
- Complete with colour temperature 3000K or 4000K LED and between 800 and 3400 lm (depending on size)
- Complete with LCS LED technology for S size with two lumen values (800/1500lm) in colour temperature 3000K, 3500K and 4000K each.
- Complete with LCS LED technology for M/L size with two lumen values (2000/3000lm) in colour temperature 3000K, 3500K and 4000K each.
- Tool free spring clip installation, directly out of the box.
- 3-pole connection terminal with plug connection, 5-pole (dimmable Dali only), through-wiring possible
- CETUS MSF version available, surface mounted luminaires with Ø180mm
- The driver used in E3 emergency options is only suitable for use with 50Hz supplies



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

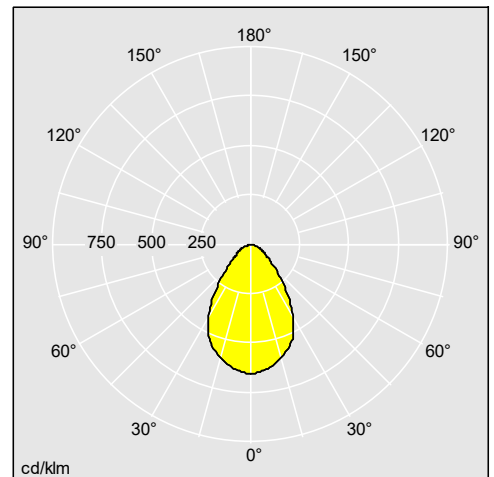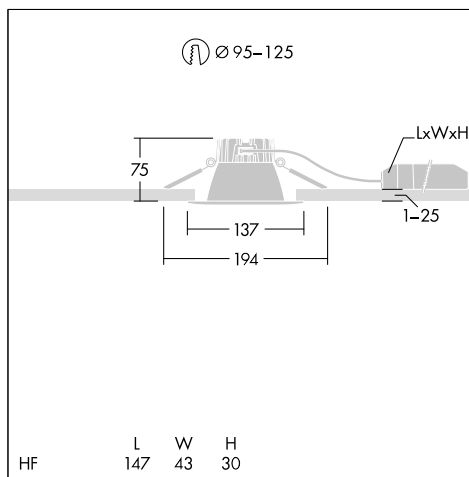

96635309

Material/Finish

Body: diecast aluminium.

Smooth reflector in white finish with wide beam; reflector/trim made of high-quality, UV-resistant polycarbonate

Smooth reflector in satinbrite finish with wide beam; reflector/trim made of high-quality, UV-resistant polycarbonate

Trim similar RAL 9016

Installation/Mounting

Cetus can be installed tool free, directly out of the box into a wide range of ceiling types, suitable for 1-35mm ceiling thicknesses. Only 100mm overall recess depth to allow installation into low and restricted ceiling voids. Remote pluggable driver makes installation and maintenance quick and easy.

Cetus3

Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Cetus S				
CETUS3 S 800-840 HF RWH	LED		0,32	96634886
CETUS3 S 1500-840 HF RWH	LED		0,32	96634887
CETUS3 S LCS HF RWH			0,32	96634894
Cetus M				
CETUS3 M 1000-840 HF RWH	LED		0,56	96634888
CETUS3 M 2000-840 HF RWH	LED		0,56	96634889
CETUS3 M 3000-840 HF RWH	LED		0,58	96634890
CETUS3 M LCS HF RWH			0,58	96634895
Cetus L				
CETUS3 L 1000-840 HF RWH	LED		0,68	96634891
CETUS3 L 2000-840 HF RWH	LED		0,68	96634892
CETUS3 L 3000-840 HF RWH	LED		0,7	96634893
CETUS3 L LCS HF RWH			0,7	96634896
Cetus Surface				
CETUS3 MSF 1000-840 EHF RWH	LED		2,59	96634897
CETUS3 MSF 2000-840 EHF RWH	LED		2,59	96634898
CETUS3 MSF 3000-840 EHF RWH	LED		2,59	96634899
CETUS3 MSF LCS EHF RWH			2,59	96634900
Cetus attachments and accessories				
CETUS3 S UGR INSERT			0,025	96635243
CETUS3 M UGR INSERT			0,067	96635244
CETUS3 L UGR INSERT			0,095	96635245
CETUS3 S UGR INSERT EM			0,025	96635246
CETUS3 M UGR INSERT EM			0,067	96635247
CETUS3 L UGR INSERT EM			0,095	96635248
CETUS3 S IP54 COVER			0,09	96635249
CETUS3 M IP54 COVER			0,079	96635250
CETUS3 L IP54 COVER			0,126	96635251
DL CONNECTION BOX 3P TERM+LINECT			0,07	96635252
DL CONNECTION BOX 5P TERM+LINECT			0,07	96635253
T CONNECTOR WO 3POLE			0,04	96635254
T CONNECTOR WO 5POLE			0,04	96635255
T CONNECTOR WL 3POLE			0,04	96635256
T CONNECTOR WL 5POLE			0,04	96635257
CHALICE/CETUS3 200 CEILING RING 250MM WH			0,56	96633598
GRIPPLE SAFETY WIRE			0,01	96239327