

# Olsys Area

THORN

96633558 OLSYS2 48L70 730 CL1 AREA A/S

ISO 9223 C3		IP66 IK08					T <sub>a</sub> 50
----------------	--	-----------	--	--	--	--	-------------------

## Olsys Area

An LED floodlight with asymmetric distribution for area lighting applications. Electronic, fixed output control gear. Class I electrical, IP66, IK08. Body: die-cast aluminium (AS9U), powder coated silver-grey (RAL 9006). Enclosure: tempered glass. Optics: aluminium. Supplied in one box, ready to install. Mounting attachments to be ordered separately. Complete with 3000K LED

ambient temperature: -30°C to +50°C

Dimensions: 505 x 337 x 76 mm


Luminaire input power: 104.5 W

Weight: 9.85 kg

Scx: 0.17 m<sup>2</sup>



TLG\_OSYS\_F\_2ASPDB.jpg

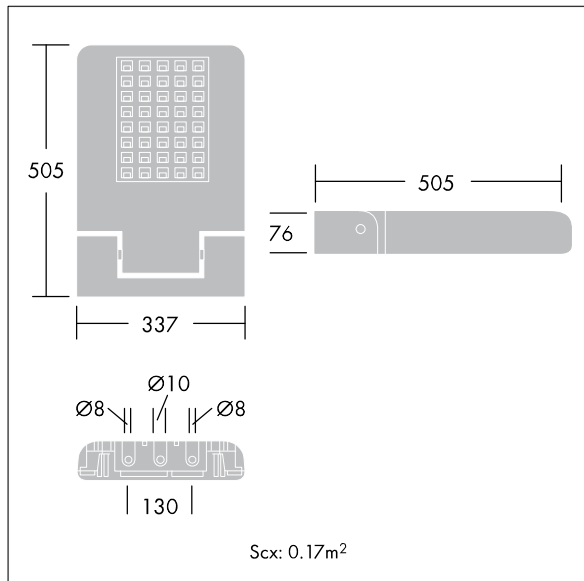

TLG\_OSYS\_M\_AREA2.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting