

# Novaline Style

# THORN

96635521 NOVS S 1400-830 DI HFI WH

|                        |      |          |    |      |   |         |      |  |  |  |  |       |                           |
|------------------------|------|----------|----|------|---|---------|------|--|--|--|--|-------|---------------------------|
| IEC EN 60598-1<br>RG 1 | RoHS | UK<br>CA | 11 | IP54 | D | halogen | IK08 |  |  |  |  | 850°C | T <sub>a</sub> -15<br>+25 |
|------------------------|------|----------|----|------|---|---------|------|--|--|--|--|-------|---------------------------|


## Novaline Style

Decorative circular luminaire with small body. Low indirect component for wall and ceiling illumination. Electronic, DALI dimmable. Aesthetic trim of the luminaire made of polycarbonate in white. Diffuser: opal polycarbonate. Class II electrical (this product is not earthed), IP54. Complete with 3000K LED.

Dimensions: Ø320 x 69 mm  
Luminaire input power: 9.7 W  
Luminaire luminous flux: 1300 lm  
Luminaire efficacy: 134 lm/W  
Weight: 1.68 kg



TLG\_NOVS\_F\_3WH.jpg

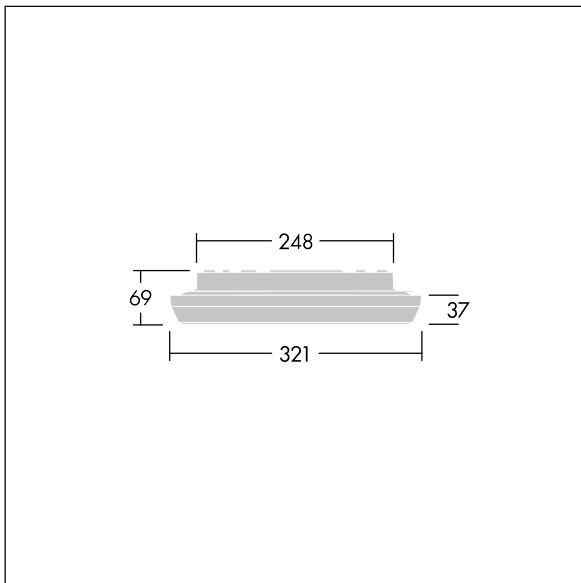

TLG\_NOVS\_M\_LD300.wmf

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting