

R2L2

96266005 R2L2 S 24L50 740 EWS CL2 GY

ISO 9223 C5	IP66	IK08					T _a -25 +50
----------------	------	------	--	--	--	--	---------------------------


R2L2

A small size LED road lighting lantern with 24 LEDs driven at 500mA with Extra Wide Street optic. LED driver Programmable. Class II electrical (this product is not earthed), IP66, IK08. Housing: die-cast aluminium (EN AC-44300), powder coated textured light grey. Enclosure: tempered flat glass. Screws: stainless steel, Ecolubric® treated. Post top (Ø60/76mm, tilted 0°/5°/10°) or lateral (Ø34/42/49/60mm, tilted 0°/-5°/-10°/-15°) mounting. For lateral mounting to Ø34/42mm spigots an adaptor (59005840 R2L2 MA34/42 NPA) should be ordered separately. Complete with 4000K LED.

Dimensions: 655 x 362 x 155 mm
 Luminaire input power: 38 W
 Luminaire luminous flux: 5525 lm
 Luminaire efficacy: 145 lm/W
 Weight: 9.35 kg
 Scx: 0.05 m²



TLG_R2L2_F_SPDB.jpg

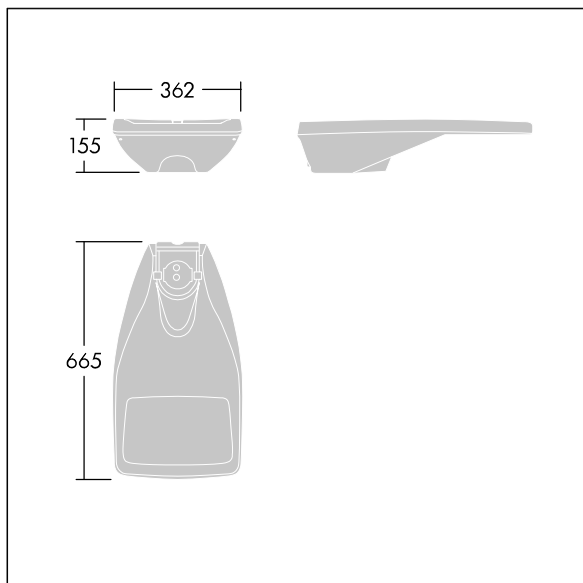

TLG_R2L2_M_LDS.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

R2L2

96266005 R2L2 S 24L50 740 EWS CL2 GY

THORN