

R2L2

THORN

96266319 R2L2 S 48L50 740 WS CLO BP 3550 CL2 GY

| | | | | | | | | |
|----------------|------|------|--|--|--|--|--|---------------------------|
| ISO 9223 C5 | IP66 | IK08 | | | | | | T _a -25 +50 |
|----------------|------|------|--|--|--|--|--|---------------------------|


R2L2

A small size LED road lighting lantern with 48 LEDs driven at 500mA with Wide Street optic. LED driver Programmable. Class II electrical (this product is not earthed), IP66, IK08. Housing: die-cast aluminium (EN AC-44300), powder coated textured light grey. Enclosure: tempered flat glass. Screws: stainless steel, Ecolubric® treated. Post top (Ø60/76mm, tilted 0°/5°/10°) or lateral (Ø34/42/49/60mm, tilted 0°/-5°/-10°/-15°) mounting. For lateral mounting to Ø34/42mm spigots an adaptor (59005840 R2L2 MA34/42 NPA) should be ordered separately. Equipped with 50% power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. Driver programmed for Constant Light Output operation. Complete with 4000K LED.

Dimensions: 655 x 362 x 155 mm
Luminaire input power: 72 W
Luminaire luminous flux: 11095 lm
Luminaire efficacy: 154 lm/W
Weight: 9.37 kg
Scx: 0.05 m²



TLG_R2L2_F_SPDB.jpg

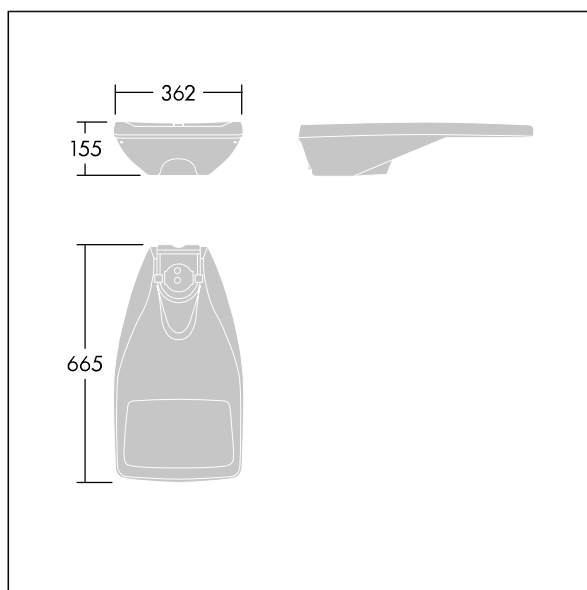

TLG_R2L2_M_LDS.wmf

This product contains light sources of energy efficiency classes D, E.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting