

IQ Wave SP

THORN

92901666 IQ SUSP S LED2600-840 HF TW6

| | | | | | | | |
|------|------|--|--|--|--|-------|---------------------------|
| IP20 | IK05 | | | | | 650°C | T _a -20 +25 |
|------|------|--|--|--|--|-------|---------------------------|

IQ Wave SP

A lightweight, Suspended, LED luminaire with MV Tech optic. Electronic, fixed output control gear. Class I electrical, IP20, IK05. Body, diffuser, frame and endcaps: polycarbonate finished in white (close to RAL9016). Gear tray: pre-coated white steel. 6 core through wiring, including feed cable. Suspension wires included. Ceiling rose to be ordered separately. Complete with 4000K LED

Dimensions: 1140 x 210 x 70 mm

Luminaire input power: 22 W


Luminaire luminous flux: 2600 lm

Luminaire efficacy: 118 lm/W

weight: 5.2 kg



TLG_IQSU_F_SUS_PDB.jpg

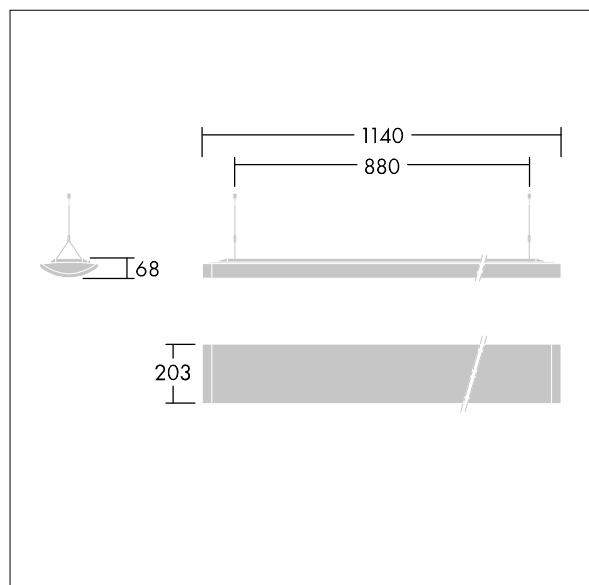

TLG_IQSU_M_SUS.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

IQ Wave SP

92901666 IQ SUSP S LED2600-840 HF TW6

THORN